

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

Title (English): WOOD WALL STRUCTURE

(French ): STRUCTURE DE MUR EN BOIS

Canadian Filing Date: 1997/12/10

Canadian Issue Date:

Laid-Open Date: 1998/07/17

Inventor: STIEMER, Siegfried Fritz; VAROGLU, Erol

Patent Assignee: FORINTEK CANADA CORP.

International Patent Classification: E04C 3/12; E04B 1/26; E04B 2/70

Priority Application Number: 08/784,977

Priority Date: 1997/01/17

Priority Country: US

OWNER#

WIPO

Enter F3=Exit F7=Prev Page F8=Next Page F9=Text  
F12=Cancel F14=Print

ABSTRACT OF THE DISCLOSURE

A wood wall structure has standard components arranged in such a way that strength and ductile capacity exceeds those in current standard wall arrangements. The structure has a top plate and a bottom plate that are substantially the same, each plate having a groove along the center face, a central sheath is positioned between the top and bottom plates fitting into each groove. Pairs of vertical framing elements extend between the top and bottom plates with the central sheath sandwiched therebetween and attachments between the pairs of framing elements retain the central sheath in position.

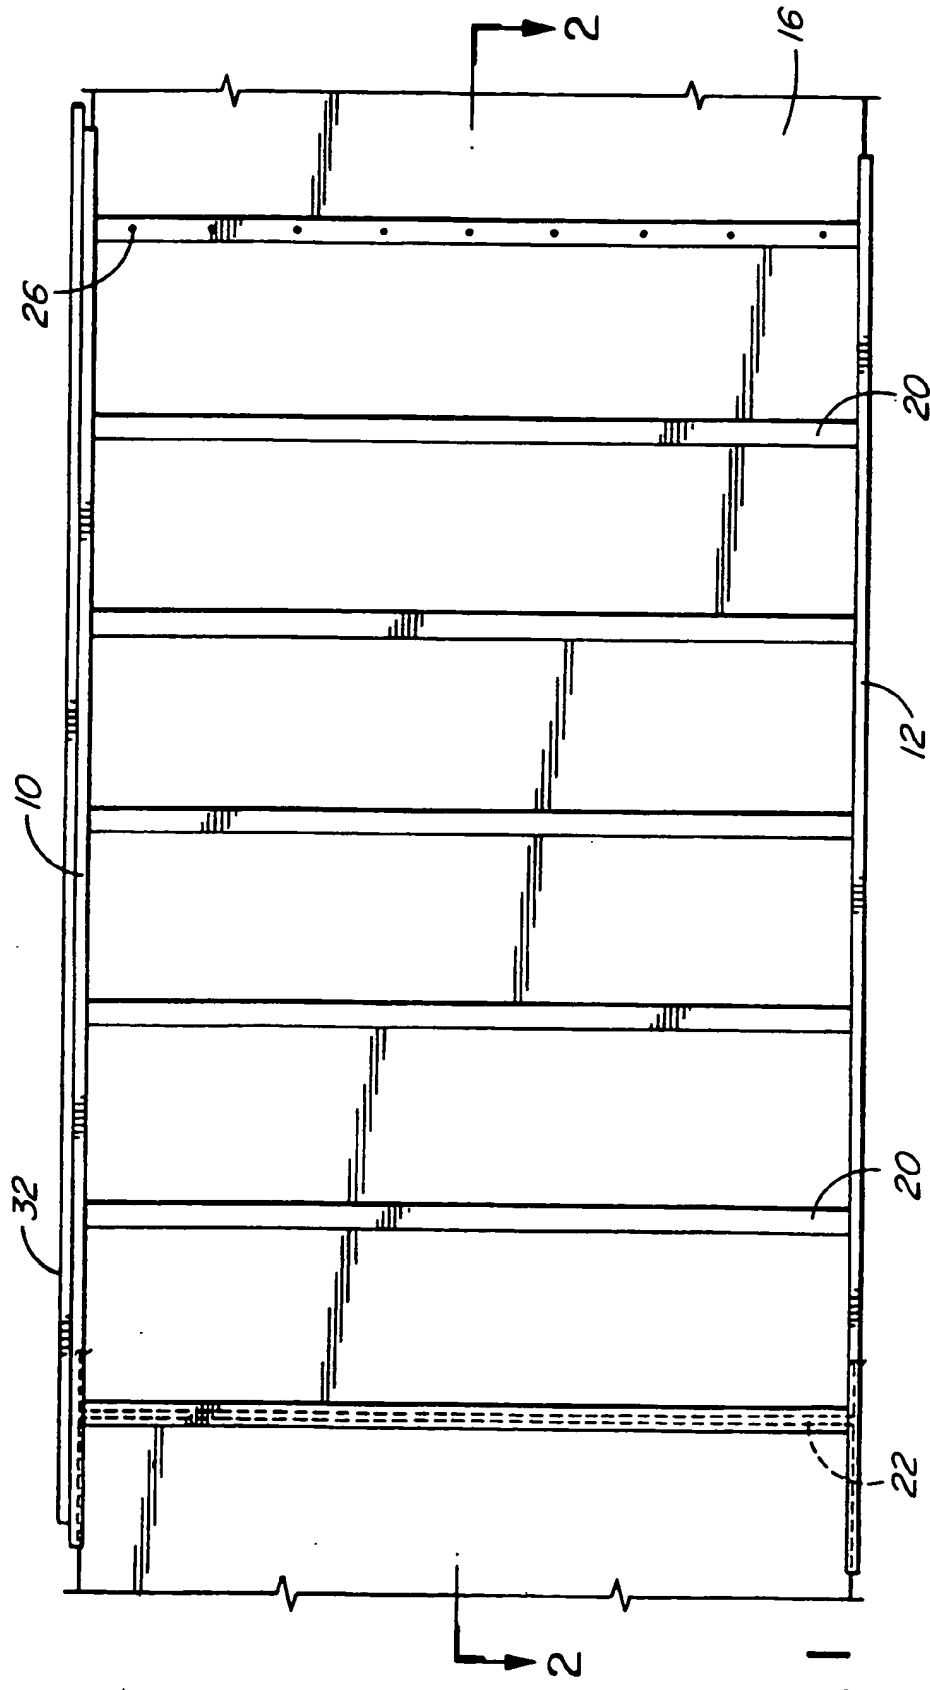


FIG. 1

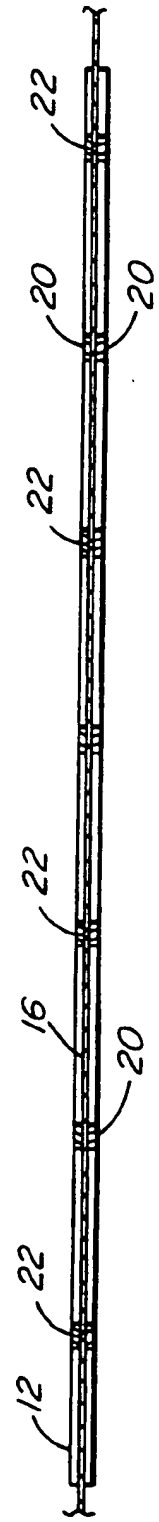


FIG. 2

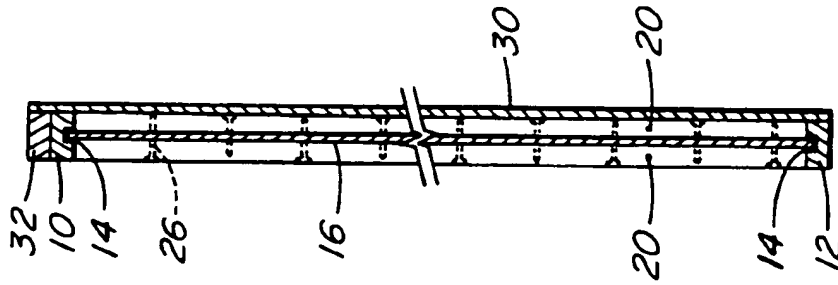


FIG. 3

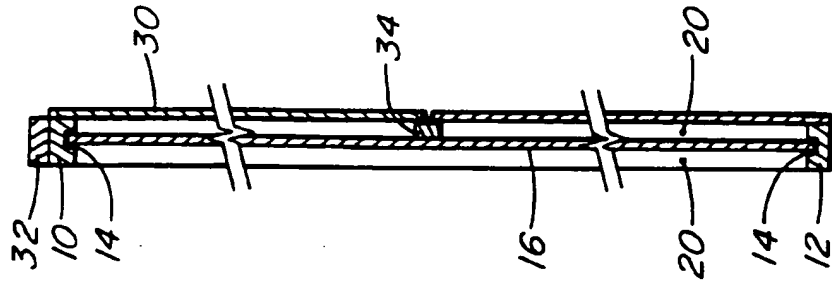


FIG. 4

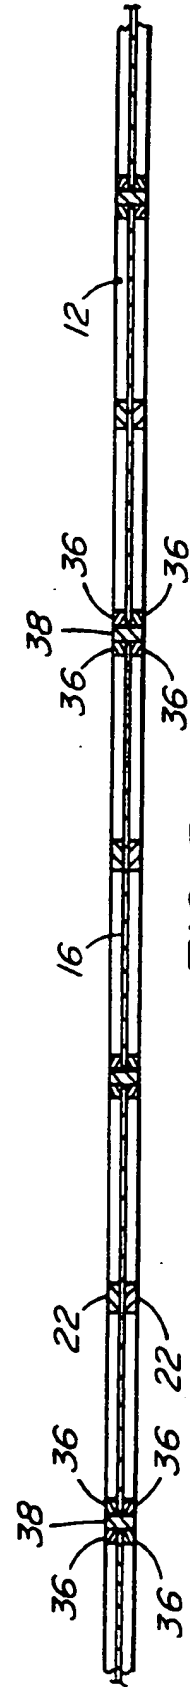


FIG. 5

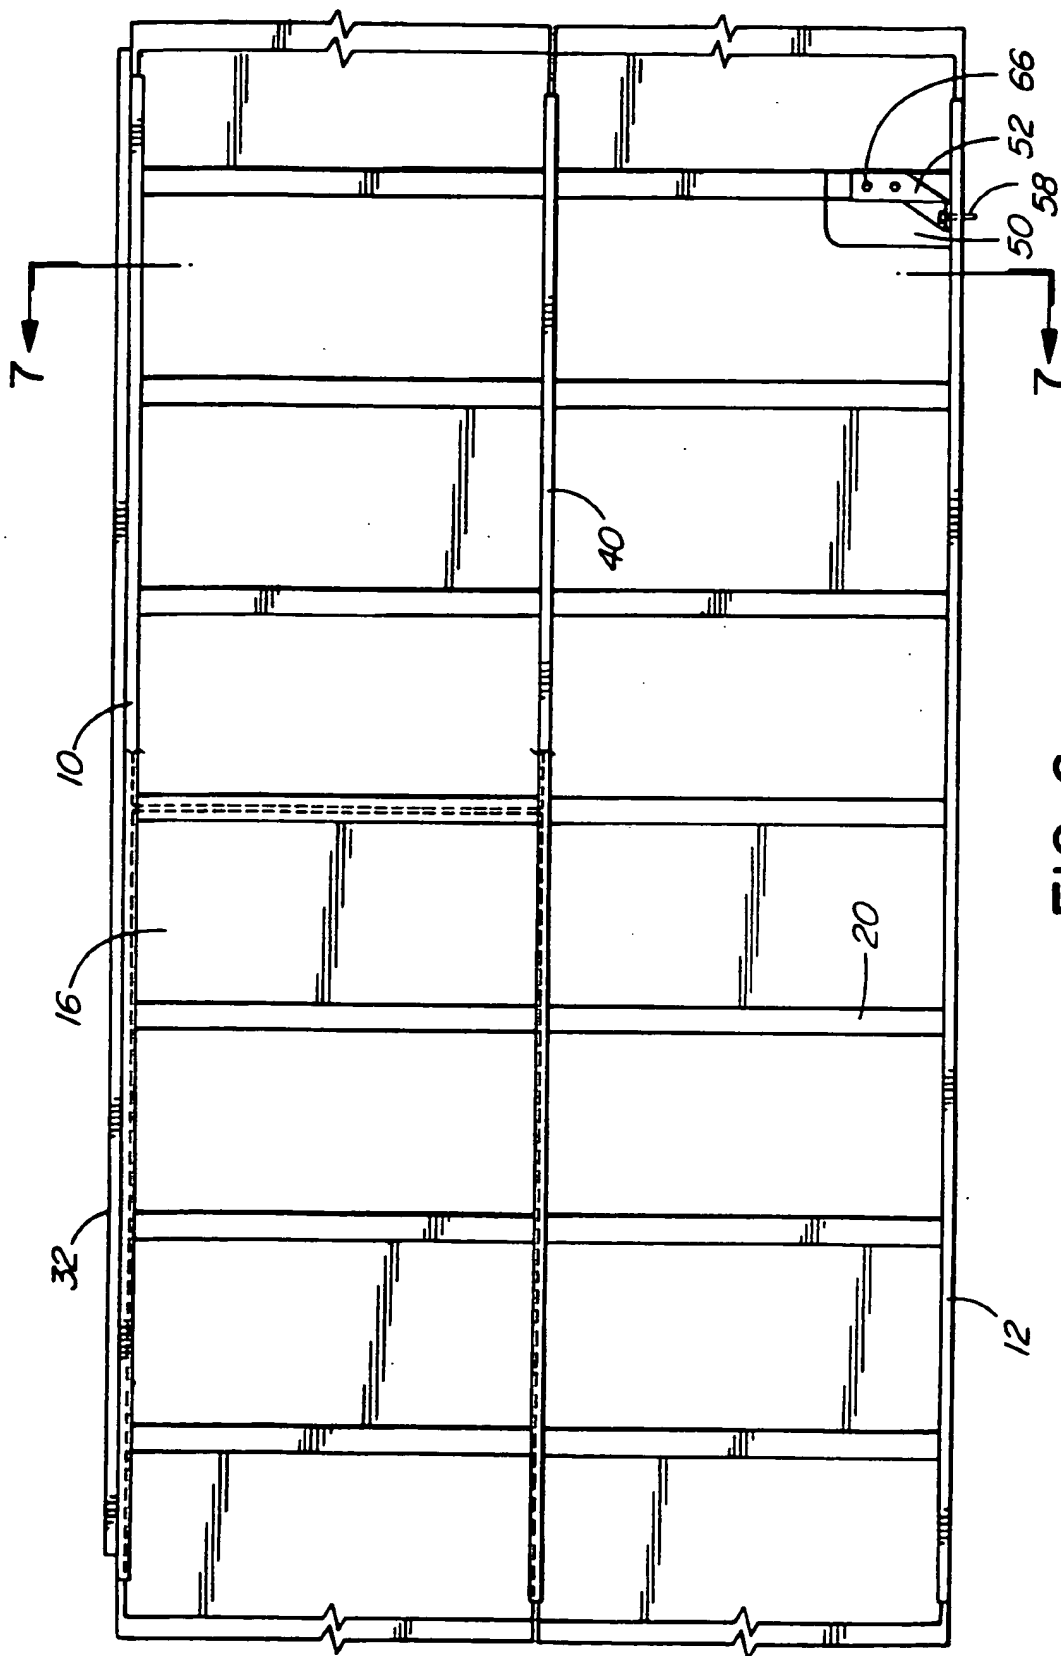


FIG. 6

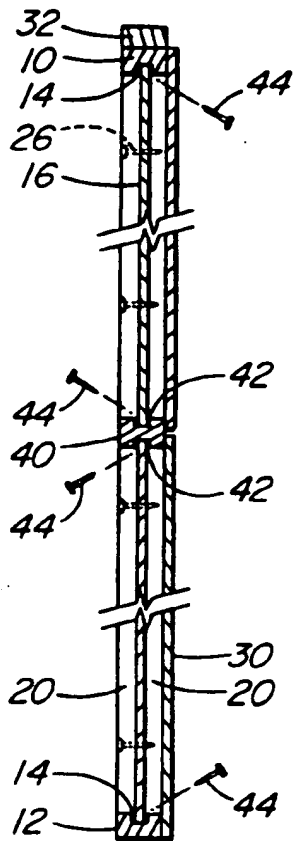


FIG. 7

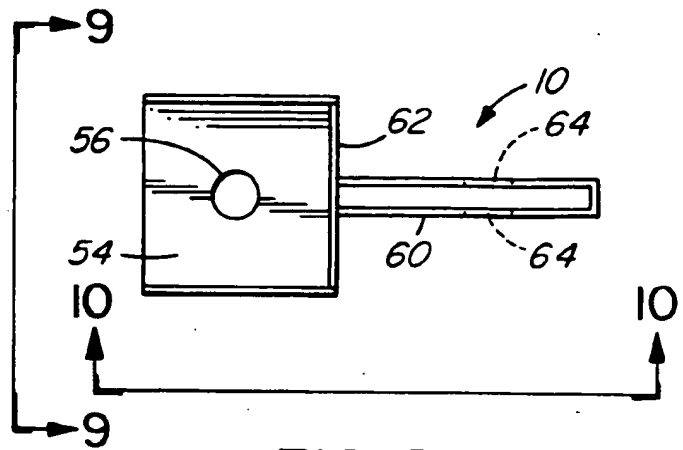


FIG. 8

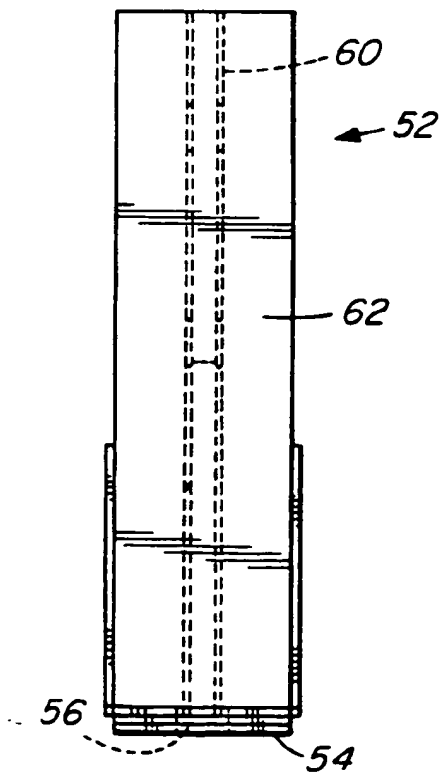


FIG. 9

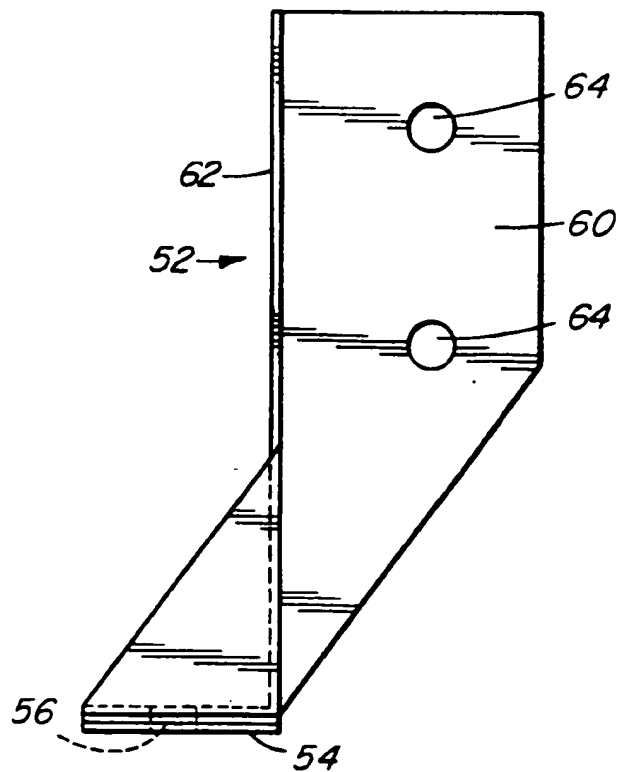


FIG. 10

- 13 -

## WE CLAIM:

1. A wood wall structure comprising:

5 a top plate and a bottom plate, both having substantially similar widths, each plate having a central groove extending longitudinally along opposing faces of the top plate and the bottom plate;

10 a central sheath positioned between the top plate and the bottom plate fitting into the central groove in each plate;

15 pairs of vertical framing elements extending between the top plate and the bottom plate with the central sheath sandwiched therebetween, the pairs of framing elements positioned at both ends of the wall structure and spaced lengthwise along the wall structure, the pairs of framing elements with the central sheath therebetween having a width substantially the same as the width of the top plate and the bottom plate, and

20 attachments between the pairs of framing elements retaining the central sheath therebetween.



- 14 -

2. The wood wall structure according to claim 1 wherein the top plate and the bottom plate are made of nominal 2" x 4" lumber and the central groove is in a nominal 4" wide face, the central groove being approximately  $\frac{1}{2}$ " wide and  $\frac{1}{2}$ " deep.
3. The wood wall structure according to claim 2 wherein the central sheath is an approximately  $\frac{1}{2}$ " thick panel and fits loosely in the central groove of the top plate and the bottom plate.
4. The wood wall structure according to claim 1 wherein the attachments are selected from the group consisting of nails and screws.
5. The wood wall structure according to claim 3 wherein the central sheath is toe-nailed in the groove of the top plate and the groove of the bottom plate.
6. The wood wall structure according to claim 1 wherein the vertical framing elements are selected from nominal lumber sizes of 2" x 2", 2" x 3", 2" x 4", 2" x 6", and 2" x 8" and are positioned so that pairs of framing elements with the central sheath therebetween have a width substantially the same as the width of the top plate and the bottom plate.

- 15 -

7. The wood wall structure according to claim 1 wherein the central sheath is selected from a plywood panel and an oriented strandboard panel.
8. The wood wall structure according to claim 7 wherein the panels have a size of approximately 8' x 4' and are positioned vertically side by side, and wherein a gap of approximately  $\frac{1}{8}$ " remains between adjoining panel edges, the adjoining panel edges positioned between a pair of vertical framing elements.
9. The wood wall structure according to claim 1 including an outside sheath mounted outside the wall structure and attached to the top plate, bottom plate and outside vertical framing elements of each of the pairs of elements.
10. The wood wall structure according to claim 9 wherein the outside sheath is formed of 8' x 4' panels mounted vertically with adjoining panel edges of the outside sheath positioned at an outside framing element of each of a first pair of framing elements, a second pair of framing elements, parallel to the first pair of framing elements having adjoining panel edges of the central sheath positioned therein.

- 16 -

11.           The wood wall structure according to claim 9  
wherein the central sheath is formed of 8' x 4'  
panels mounted vertically and the outside sheath is  
formed of 8' x 4' panels mounted horizontally, and  
5 including a central nailing strip positioned  
centrally along the wood wall structure between the  
top plate and the bottom plate to which the panels  
of the outside sheath are attached.
12.           The wood wall structure according to claim 1  
10 wherein the central sheath is formed of 8' x 4'  
panels mounted vertically with pairs of vertical  
framing elements at both ends of the panels and  
including an adjoining framing element positioned  
between vertical edges of panels of the central  
15 sheath.
13.           The wood wall structure according to claim 12  
including an outside sheath formed of 8' x 4'  
panels, and wherein adjoining edges of the panels of  
the outside sheath are positioned at first pairs of  
20 vertical framing elements, and second pairs of  
framing elements parallel to the first pairs of  
framing elements having adjoining panel edges of the  
central sheath positioned therein.
14.           The wood wall structure according to claim 1  
25 wherein the central sheath is formed of 8' x 4'

- 17 -

panels mounted horizontally with central framing elements having grooves on opposing faces for horizontal edges of the central sheath panels to fit therein.

5    15.        The wood wall structure according to claim 14  
             including an outside sheath formed of 8' x 4' panels  
             mounted horizontally and attached at adjoining  
             horizontal edges to the central framing elements,  
             adjoining vertical edges of the panels of the  
10       outside sheath and adjoining vertical edges of the  
             panels of the central sheath being staggered.

             16.        The wood wall structure according to claim 14  
             including an outside sheath formed of 8' x 4' panels  
             mounted vertically, and with adjoining edges of the  
15       panels of the outside sheath positioned at first  
             pairs of vertical framing elements, and with  
             adjoining edges of the panels of the central sheath  
             positioned at second pairs of vertical framing  
             elements parallel to the first pairs of vertical  
20       framing elements.

             17.        The wood wall structure according to claim 1  
             wherein the thickness of the structure is nominally  
             4".

- 18 -

18.           The wood wall structure according to claim 1  
including a hold down bracket having a bottom member  
to rest on the top or bottom plate with a vertical  
wall section extending between a pair of vertical  
5           framing elements, the hold down bracket having a  
hole in the bottom member for a hold down wall, and  
further attachments connecting the vertical wall  
between the pair of vertical framing elements.

WOOD WALL STRUCTURE

The present invention relates to wood frame  
buildings and more specifically to a wood wall structure  
5 having improved strength properties over standard  
structures.

Wood frame houses have a reputation of performing  
well during severe earthquakes and hurricanes. The  
standard wood wall frame consists of vertical and  
10 horizontal elements generally with a structural sheathing  
on one side. The vertical and horizontal elements,  
generally referred to as studs and plates respectively,  
are made of dimensioned lumber of nominal 2" x 4" or  
wider and the structural sheathing is generally plywood  
15 or oriented strandboard (OSB) panels. Gypsum boards may  
be used as an inside layer, but these can only provide a  
limited contribution to the strength of the wall  
structure.

Wood frame construction has evolved to include  
20 multi-family residences of three or four storeys,  
however, in recent years damage to multi-storey modern  
buildings from hurricanes and earthquakes has resulted in  
limiting the use of wood in shear walls in regions  
susceptible to severe earthquakes or strong winds. Thus,

- 2 -

there is a demand for stronger shear walls made from wood.

The present invention provides a shear wall made of wood with standard components arranged in such a way that  
5 the shear, bending, compression and ductile capacity of the system exceeds that in current standard wall arrangements. The design helps to prevent or reduce the damage that a multi-storey modern building in wood frame construction might experience during an earthquake or  
10 from strong winds. It permits wood frame buildings to be built to greater heights than the current three or four storeys and accommodates prefabrication which in some instances is desirable to achieve quality control.

The wood wall structure of the present invention has  
15 a top plate and a bottom plate, preferably nominal 2" x 4" lumber, thus having substantially the same width. Each plate has a groove extending longitudinally along the center of one wide face, and between these two plates is a central sheath, preferably plywood or OSB panels,  
20 that fit into the grooves in the top and bottom plates, thus the sheath is retained by the grooves and unlike existing wall structures does not have to be attached to either the outside or the inside of the wood frame. Pairs of vertical framing elements, namely studs,  
25 preferably nominal 2" x 4" lumber, although other sizes may be used, extend between the top plate and the bottom

- 3 -

plate sandwiching the central sheath therebetween. In effect the studs are turned through 90° from the standard wood frame construction, thus the distance across the two studs and the sheath therebetween is a nominal four  
5 inches which is the same as the width of the top and bottom plates. This design permits the sheathing panels to be fastened to the wide faces of the studs instead of the narrower faces of the nominal two inch width and this increases the load capacity of the wall structure by  
10 providing more edge distance for fasteners on studs as well as on edges of the central sheathing. Also the head of the nails are kept away from the surface of the sheathing panels so that nail withdrawal from the panels is physically prevented. Nails fastening the sheathing  
15 panels to the studs work in double shear, thus providing increased lateral load carrying capacity for the wall structure in comparison to the nails working in single shear in standard shear wall structure.

The wall structure therefore has a central sheath  
20 which has edges fitting either in grooves and/or being sandwiched between wide faces of studs and joined together by nails or screws that pass through two studs and both sides of the sheathing panels, thus increasing the shearing capacity of the wall structure without  
25 increasing the width of the wall.



- 4 -

The present invention provides a wood wall structure comprising: a top plate and a bottom plate, both having substantially the same width, each plate having a groove extending longitudinally along the center of a face of the top plate and the bottom plate; a central sheath positioned between the top plate and the bottom plate fitting into each groove; pairs of vertical framing elements extending between the top plate and the bottom plate with the central sheath sandwiched therebetween, the pairs of framing elements positioned at both ends of the wall structure and spaced along the length of the wall structure, the pairs of framing elements with the central sheath therebetween having a width substantially the same as the width of the top plate and the bottom plate, and attachments between the pairs of framing elements retaining the central sheath therebetween.

In drawings which illustrate embodiments of the present invention,

Figure 1 is an elevational view showing a wood wall structure according to one embodiment of the present invention,

Figure 2 is a sectional view taken at line 2-2 of Figure 1,

- 5 -

Figure 3 is a vertical sectional view showing another embodiment of a wood wall structure according to the present invention,

Figure 4 is a vertical sectional view showing a  
5 further embodiment of a wood wall structure according to the present invention,

Figure 5 is a horizontal sectional view showing yet another embodiment of a wood wall structure according to the present invention,

10 Figure 6 is an elevational view showing a wood wall structure with horizontal central sheath panels and horizontal outside sheath panels,

Figure 7 is a sectional view taken at line 7-7 of Figure 6,

15 Figure 8 is a plan view showing a hold down detail according to one embodiment of the present invention,

Figure 9 is an end view taken at line 9-9 of Figure 8,

Figure 10 is a side view taken at line 10-10 of  
20 Figure 8.

- 6 -

Figures 1 and 2 illustrate a wood wall structure according to one embodiment of the present invention which comprises a top plate 10 and a bottom plate 12 made of nominal 2" x 4" lumber with the 4" side representing the thickness of the wall structure. Both plates 10 and 12 have a longitudinal groove 14 on the inside surface in the approximate center of each plate. Details of the groove 14 may be seen in Figure 3. Into this groove 14 fits a central sheath panel 16, the grooves 14 are approximately  $\frac{1}{2}$ " wide and  $\frac{1}{2}$ " deep. The central sheath panel 16 are approximately  $\frac{1}{2}$ " thick and is therefore held between the two plates 10 and 12. In general panels 16 have a loose fit in the grooves 14 for ease of installation and also to ensure that the panels 16 do not bind in the grooves 14.

The central sheath 16 is preferably made from 8' x 4' panels of plywood or oriented strandboard with a thickness of  $\frac{1}{2}$ ". Figures 1 and 2 show the panels 16 mounted vertically, thus the height of the wall structure is approximately 8'. The panels may be cut to the desired height of the wall structure. Pairs of vertical framing elements 20 which are studs made of nominal 2" x 4" lumber are positioned one on each side of the central sheath panel 16 sandwiching the panel in between the studs 20. The studs 20 are placed with the wider faces along the sheathing panels 16 rather than the common practice of placing the studs with the wide side

- 7 -

representing the thickness of a wall structure. Pairs of studs 20 are spaced substantially evenly along the wall structure. Edges of adjacent panels 16 are positioned so that they come between a pair of studs 20 with a small  
5 space 22 between panel edges as shown in Figure 2. As the panels are 4' wide, the pairs of studs 20 are generally spaced either 24" or 16" apart.

Nails 26 pass through one stud 20 of a pair, through the central sheath panel 16 and into the second stud 20.  
10 Thus the nails 26 work in double shear to provide increased lateral load carrying capacity for the wall. The studs 20 being nominal 2" x 4" lumber have the wider face along the wood wall structure which increases the lateral load capacity of the wall by providing more edge  
15 distance for fasteners on the studs 20 and edges of the sheath panels 16.

Figure 3 shows a wall structure similar to that shown in Figures 1 and 2 but has an outside sheath panel 30 attached to the outside of the wall structure. The  
20 attachment is by nails or screws to the outside surfaces of the studs 20 and the plates 10 and 12. The outside sheath panel 30 may be a minimum of  $\frac{1}{4}$ " thick plywood or OSB. The outside sheath 30 increases the shear strength of the wall structure.

- 8 -

A nailing plate 32 is shown attached above the top plate 10. The nailing plate 32 is provided as a standard item in most wall structures for connection to the upper floor or roof structure.

5        Figure 3 illustrates the central sheath panels 16 and the outside sheath panels 30, both being vertical panels, preferably 8' x 4'. The edges of adjoining central panels 16 do not overlap with the edges of adjoining side panels 30. The joint of the central  
10 sheath panels 16 occurs in between one pair of studs 20 and the joint of the outside sheath panels 30 occurs in between an adjacent or different pair of studs 20.

Figure 4 illustrates a wall structure similar to that shown in Figure 3 except the outside sheath panels  
15 30 are arranged horizontally rather than vertically. Thus, nailing strips 34 at the mid-height of the structure are positioned between studs 20 on the outside so that the outside sheath panels 30 can be affixed thereto.

20        Figure 5 illustrates a wall structure similar to that shown in Figure 2 except that the vertical edges of the central sheath panels 16 are contained within a pair of nominal 2" x 2" lumber studs 36, thus forming in effect a groove for holding the vertical edges of the panels 16.  
25 In between these vertical edges is an intermediate

- 9 -

nominal 2" x 4" lumber stud 38 to provide additional strength. Thus, the wall construction is divided into 4' panels with the intermediate stud 38 therebetween. Whereas the nominal 2" x 2" lumber studs 36 are shown in Figure 5, it will be apparent that these could be other nominal lumber sizes such as 2" x 3"s or 2" x 4"s. Furthermore, while 2" x 4"s have been shown in the drawings throughout, it is always preferred that the top plate 10 and bottom plate 12 are always 2" x 4"s but the other studs may be selected from nominal lumber sizes such as but not limited to 2" x 2"s, 2" x 4"s, 2" x 6"s, or 2" x 8"s. In other countries where nominal lumber sizes are different and not in inches, then metric dimensioned framing elements may be used. The key being that the width of the top and bottom plates 10,12 is substantially the same as the width across the pair of studs or structural elements 20 with the central sheath panel 16 therebetween.

A different arrangement of a wood wall structure is shown in Figures 6 and 7. In this embodiment the central sheath panels 16 are shown extending horizontally rather than vertically and have a central frame element 40 which is a nominal 2" x 4" lumber stud and has central grooves 42 on each side as illustrated in Figure 7. The top edges of the lower panels 16 and the lower edges of the top panels 16 both fit into the grooves 42, thus the central panels 16 are contained around all the edges. In

- 10 -

another embodiment the central framing element 40 is replaced by two 2" x 4"s or 2" x 3"s with a space therebetween to act as a groove for the top edge of the bottom panel 16 and the bottom edge of the top panel 16.

5       As shown in Figure 7, horizontal outside sheath panels 30 are also supplied. These panels join at the center framing element 40 and are nailed thereto, as well as being nailed to the top plate 10, bottom plate 12, and framing elements 20.

10       In another embodiment vertical outside sheath panels 30 are supplied. While not shown in the drawings, these vertical outside sheath panels 30 join at framing elements 20 and are nailed to the top plate 10, bottom plate 12 and the framing elements 20.

15       In another embodiment, as shown in Figure 7, nails 44 are provided which are directed at an angle to act as toe-in nails for the edge of the central sheath panel 16 attaching through the grooves 14 of the top plate 10 and bottom plate 12 and also attaching through the grooves 42  
20 of the central framing element 40. Whereas nails have been described herein, screws may equally well be used or other similar type of attachment devices.

The wood wall structures may be used in new wood frame construction or retrofitting of existing wood frame

- 11 -

buildings in order to improve their earthquake or wind resistance. Furthermore, the structure may be used in the new type of post and beam construction as well as retrofitting post and beam construction for improved resistance. In each case the wall structure provides additional strength for earthquake and wind resistance. In some cases it may be preferable to strengthen the lower storeys of a building by replacing certain wall sections in existing buildings with the wall structure of the present invention. The wall structures can be manufactured in an assembly plant or made on site. The advantage of assembly plant construction is that jigs can be used which generally produce structures with better tolerances.

Hold down cutouts 50 are shown in Figure 6 in central sheath panels 16 for a hold down 52 as shown in Figures 8, 9 and 10. The hold down bracket 52 has a bottom member 54 with a hole 56 for a hold down bolt 58 as shown in Figure 6. A vertical wall 60 extends up between a pair of framing elements 20, a front panel 62 positions the apparatus against the framing elements 20, and holes 64 in the wall 60 permit bolts 66 to hold the apparatus in place. Hold downs 52 may be positioned to hold through the top plates 10 or bottom plates 12.

Rigid insulation may be placed in the space between the studs 20. In the case of nominal 2" x 4" lumber, 1½"



- 12 -

rigid insulation may be used on both sides of the central sheath panels 16. If additional rigid insulation is required it may be placed on the outside of the wall structure.

5           Grooves may be provided on the face of studs, and holes may be made in the central sheath panels 16 for electrical wiring installation either on site or in the case of a prefabricated wall may be made during fabrication.

10           Various changes may be made to the embodiments shown herein without departing from the scope of the present invention which is limited only by the following claims.